
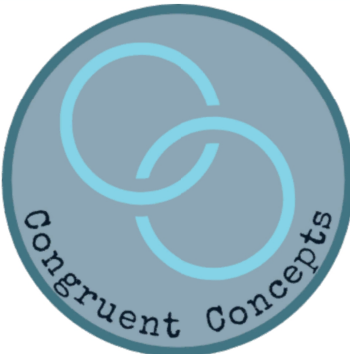


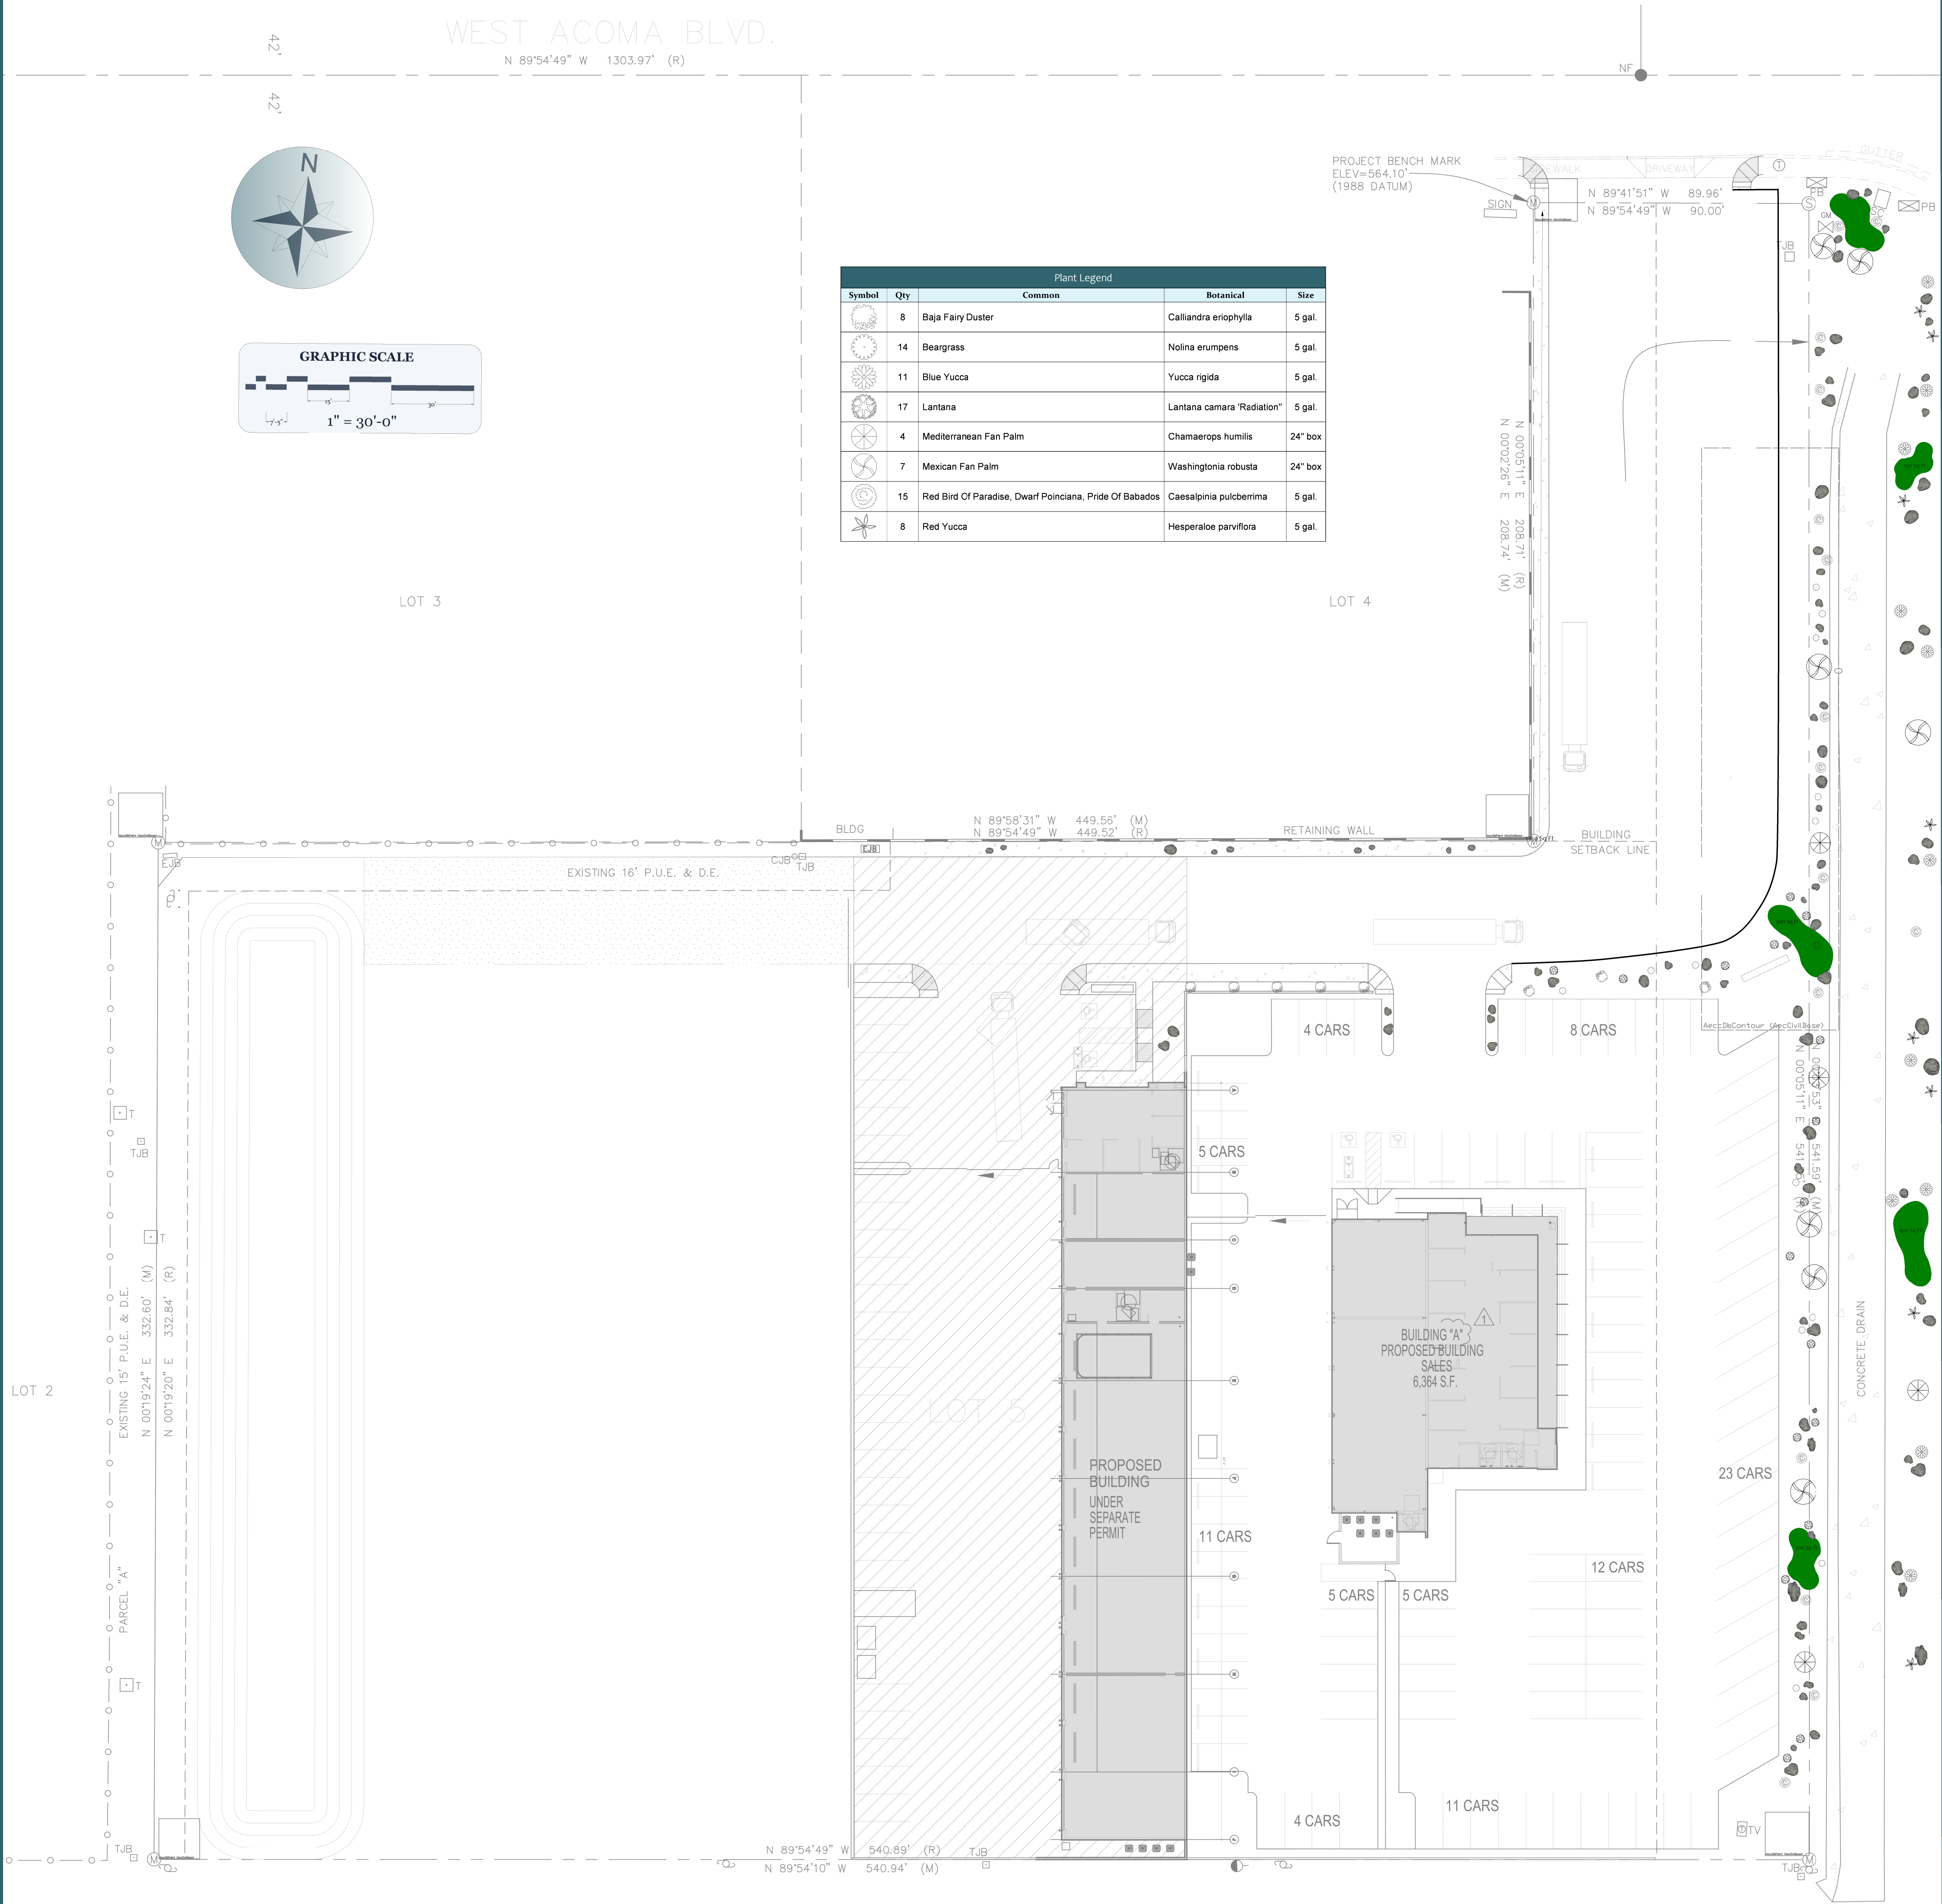

Drawn by: MPB
Reviewed by: _____
Date 10.07.2021
Scale: 1" = 30'

Landscape Plan for:
1720 W Acoma Blvd-Riverview Auto
Lake Havasu City, AZ

Landscape Design
by:
Congruent Concepts
Prepared by:
Mike Brenneman
702.863.8618
info@congruent.cc

All slopes shall be built up with a clean AB base, free of any weeds or foreign debris. All mounds shall gradually transition in grade. No mounding shall interfere with any signage or other significant views. No mounds to exceed a 2:1 slope, and all irrigation shall be buried at least 6" below grade. Congruent Concepts reserves the right to mildly alter this design in the field, due to unforeseen outside elements, which may present themselves during construction. All borders shall be buried 1/3 below grade. All plants and trees shall be planted below grade with a 25% mulch mixture and a planting well incorporated around each plant. Each tree shall be fitted with a low voltage LED uplight, while additional path lighting shall be incorporated along the sidewalks. Every effort has been made to accurately define the above described landscape within the specified area. Please contact Congruent Concepts directly to address any questions, comments or concerns relating to any discrepancies lying within.



NOTES:	
Date	Revisions